

TEMPERATURE AND PRESSURE LIMITS

- Minimum Pressure 35kPa
- Maximum Pressure 1000kPa
- Maximum hot water Temperature 70 degrees Celsius

For cold water pressure above 600kPa we recommend the installation of a pressure limiting valve.

We recommend using a line strainer on both hot and cold supply lines to this mixer. This will help protect the ceramics in your mixer.

CLEANING

To retain the original look of your Aquatica Laundry product, please follow these simple suggestions:

DO NOT use acidic, abrasive, chlorine or alcohol based cleaners. Many of these products can damage chrome and powder coated surfaces.

DO remove dirt or calcium stains with soap and water, rinse with clean water and dry with a clean soft cloth.



Aquatica NZ Limited offer, from the date of purchase, a 5 year guarantee on the cabinet and taps and a 25 year guarantee on the laundry bowl. Aquatica NZ Limited warrants that only high quality workmanship and materials have been used in the manufacture of the laundry tubs. The guarantee is transferable but original proof of purchase from an authorised Aquatica distributor is required. If any faulty workmanship or materials are proven during the warranty period Aquatica NZ Limited will, at its own cost, repair or, at its option, replace the faulty product. If spray or abrasive cleaners are used on the chrome and powder coated surfaces, it will void the warranty. (The chrome and cabinet should only be cleaned with mild detergent on a soft damp cloth).

Failure to use an in-line strainer or filter on the mixer may also void the warranty. Pressure limiting is recommended above 600kPa and should never exceed 1000kPa.

INSTALLATION INSTRUCTIONS

AQ LAUNDRAMAX900 SS
AQ LAUNDRAMAX900 CT
AQUATICA LAUNDRMAX 1200 CT

SS = Stainless Steel
CT = Composite Top
O = Oblio Sink Mixer
SS = Stainless Steel Top
L = Left bowl




If a sink mixer is not specified, then the laundry tub comes with a Xera Gooseneck Sink Mixer.

If not specified left or right, then the bowl is centred.

Variations Available:

- Change to an Oblio Sink Mixer (mains pressure only)
- Change of bowl position to Left or Right (Composite Top only)

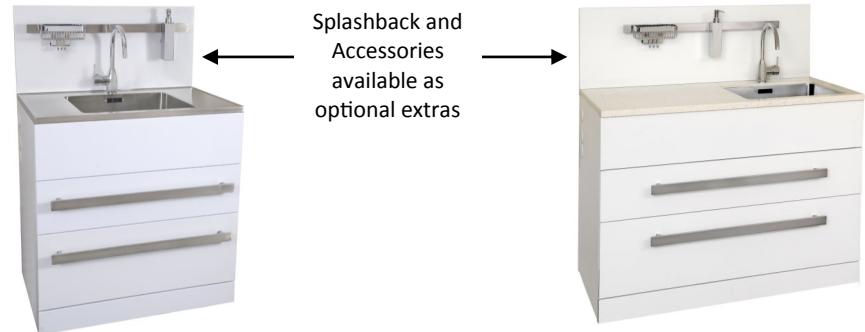

Drawer Removal

Drawer models require the removal of the drawers to complete the supply and waste connections. The top drawer is removed by opening fully and then lifting the drawer front upwards until the drawer runners disengage.

To remove the bottom drawer, almost fully extend the drawer and remove the clear rubber blocks from the drawer runners (pictured). Then disengage the grey lock tabs by sliding backwards, then forwards (pictured). Now fully extend the drawers and lift the drawer front upwards until the runners disengage.



INSTALLATION

The Aquatica 900/1200 range of laundry tubs uses a pair of Universal taps for connection of hot and cold water supplies to both the mixer and washing machine.

- Unpack and inspect laundry tub for shipping damage. Please advise your plumbing retailer if damage has occurred. Aquatica NZ Ltd will not be responsible for repair costs if damage is reported after installation.
- Fit the drawer handles.
- Fit single lever mixer and configure for your water supply system.



Mains pressure hot and cold water

Does not need P.C.W.

Can leave flow guide (max flow) in mixer or swap to P.C.A. (8 litres/min)

Low pressure hot and cold water

Fit as supplied. May fit aerator but will reduce the flow of water.

Low pressure hot and mains pressure cold water-

Leave flow guide in place. Must fit P.C.W. to prevent high pressure cold water back-flowing into the low pressure hot water line.



- Unpack Universal taps and, using an appropriate jointing method, connect to the wall outlets.
- The Universal taps are supplied with $\frac{1}{2}$ " BSP and a $\frac{3}{4}$ " BSP caps and we recommend leaving these installed until the mixer and washing machine connections are required.
- The laundry cabinet can now be fitted against the wall.
- All models must be installed level to ensure drawers line up correctly. If the cabinet is out of level the drawer fronts can become staggered. Adjust feet to correct any misalignment. If further adjustment is required, this can be achieved using a screwdriver on the drawer connector brackets.
- Drawer model cabinets must be secured to the floor or wall framing at both sides to prevent tipping forward.
- With the Laundry cabinet secured, connect the flexitails from the tub mixer to the $\frac{1}{2}$ " BSP outlet of the Universal taps and the washing machine hoses to the larger $\frac{3}{4}$ " BSP outlet of the Universal taps.
- Connect waste outlet to household plumbing via trap (trap not supplied).
- Insert discharge hose from washing machine directly into the inlet on the cabinet side. Secure in place using the cable tie provided. Cabinet washing machine inlet fitting can be reversed to the opposite side of the cabinet if required.
- With all plumbing connections completed, turn on the Universal taps and check that all connections are watertight.
- Refit drawers using the reverse of the removal procedure.

BACK VIEW OF CABINET

This shows the open area at the rear of the tub to allow for positioning of the water inlets and waste water outlet.

Suggested height for water outlets ~550mm up from the floor (centered around the tap).

Suitable for P and S traps.

Trap attachment height ~ 460mm up from the floor.


Floor area required to fit laundry tub:

900 model: Width: 905mm

Depth: 570mm

1200 model: Width: 1205mm

Depth: 570mm

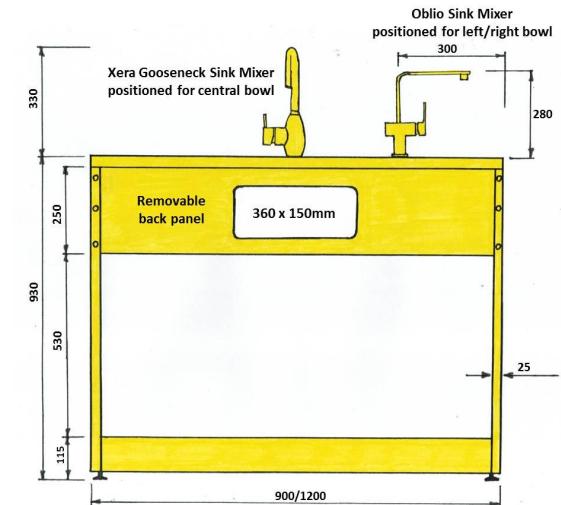

Notes:

1. Not recommended to have waste pipe within 50mm of plug centre line as this will make waste connections more difficult.
2. Bracing on base of the cabinet extends in 40mm from each side and 70mm in front and rear.
3. Height dimensions will vary a bit depending on the adjustment of the leveling feet.
4. Drawer to floor and drawer to rear wall gap is at least 120mm to allow for plumbing connections.

If you require any additional assistance, please contact :

Aquatica NZ Ltd, P O Box 19146, Avondale, Auckland.

Phone: (09) 828 2068 Fax: (09) 828 2069

Email: info@aquatica.co.nz

www.aquatica.co.nz