

TEMPERATURE AND PRESSURE LIMITS

- Minimum Pressure 35kPa
- Maximum Pressure 1000kPa
- Maximum hot water Temperature 70 degrees Celsius

For cold water pressure above 600kPa we recommend the installation of a pressure limiting valve.

We recommend using a line strainer on both hot and cold supply lines to this mixer. This will help protect the ceramics in your mixer.

CLEANING

To retain the original look of your Aquatica Laundry product, please follow these simple suggestions:

DO NOT use acidic, abrasive, chlorine or alcohol based cleaners. Many of these products can damage chrome and powder coated surfaces.

DO remove dirt or calcium stains with soap and water, rinse with clean water and dry with a clean soft cloth.



Aquatica NZ Ltd offers, from the date of purchase, a 5 year guarantee on the cabinet and taps and a 25 year guarantee on the laundry bowl. Aquatica NZ Ltd warrants that only high quality workmanship and materials have been used in the manufacture of the laundry tubs. The guarantee is transferable but original proof of purchase is required. If any faulty workmanship or materials are proven during the warranty period Aquatica NZ Ltd will, at its own cost, repair or, at its option, replace the faulty product. If spray or abrasive cleaners are used on the chrome and powder coated surfaces, it will void the warranty. (The chrome and cabinet should only be cleaned with mild detergent on a soft damp cloth).

Failure to use an in-line strainer or filter on the mixer may also void the warranty. Pressure limiting is recommended above 600kPa and should never exceed 1000kPa.



INSTALLATION INSTRUCTIONS

AQ HUBTUB SLIM DR AQ HUBTUB SLIM

DRAWER MODEL

If you have a drawer model, read below. If not, please ignore this section.

Drawer Removal

Drawer models require the removal of the drawers to complete the supply and waste connections. The top drawer is removed by opening fully and then lifting the drawer front upwards until the drawer runners disengage.

To remove the bottom drawer, almost fully extend the drawer and disengage the grey plastic locking tabs (see photo) by sliding towards rear of drawer, then lifting to disengage grey locking tab. Pull drawer out until you feel it jump past the rubber stops. Now lift front of drawer up until the drawer runners disengage.

(Note: Locking tabs cannot be disengaged if drawer is fully extended).



DOOR MODEL

If you have a door model and want the door to swing from the other side, read below. If not, ignore this section.

Door Reversal

(Full width door, rectangular handle)

When engaging or disengaging pivot pins, hold door to remove weight off pivot point. Do NOT allow the screw head to rise up.

- Open door and retract top pivot pin by screwing anticlockwise until it stops (approx. 15 turns of 2.5 mm Allen key).
- Remove door basket.
- Lift door off bottom pivot point.
- Rotate door 180 degrees to new side.
- Reset door to these conditions:
 1. Basket brackets at bottom of door
 2. Top pivot pin fully retracted
 3. Bottom pivot pin fully extended with nylon washer fitted

Anticlockwise to retract

Clockwise to engage

- Refit door at lower pivot point, then extend upper pivot pin (clockwise).
- Refit door basket to locating tabs on door brackets.



INSTALLATION

This range of laundry tubs uses a pair of Universal taps for connection of hot and cold water supplies to both the mixer and washing machine.

- Unpack and inspect laundry tub for shipping damage. Please advise your plumbing retailer if damage has occurred. Aquatica NZ Ltd will not be responsible for repair costs if damage is reported after installation.
- Check that the pre-plumb work is suitable for your tub.
- Unpack Universal taps and, using an appropriate jointing method, connect to the wall outlets.
- The Universal taps are supplied with ½" BSP and a ¾" BSP caps and we recommend leaving these installed until the mixer and washing machine connections are required.
- Fit single lever mixer, if not already fitted, and configure for your water supply system.



Mains pressure hot and cold water

Does not need P.C.W.

Can leave flow guide (max flow) in mixer or swap to P.C.A. (8 litres/min)

Low pressure hot and cold water

Fit as supplied. May fit aerator but will reduce the flow of water.

Low pressure hot and mains pressure cold water-

Leave flow guide in place. Must fit P.C.W. to prevent high pressure cold water back-flowing into the low pressure hot water line.

- The laundry cabinet can now be fitted against the wall.
- All models must be installed level to ensure door or drawers line up correctly. If the cabinet is out of level the drawer fronts can become staggered. Adjust feet to correct any misalignment. On the drawer model, if further adjustment is required, this can be achieved using a screwdriver on the drawer connector brackets.
- We recommend that all laundry cabinets are securely fastened to prevent movement and excessive load on plumbing connections. Drawer model cabinets must be secured to the floor or wall framing at both sides to prevent tipping forward.
- With the Laundry cabinet secured, connect the flexitails from the tub mixer to the ½" BSP outlet of the Universal taps and the washing machine hoses to the larger ¾" BSP outlet of the Universal taps.
- Connect waste outlet to household plumbing via trap (trap not supplied).
- Insert discharge hose from washing machine directly into the inlet on the cabinet side. Secure in place using the cable tie provided. Cabinet washing machine inlet fitting can be reversed to the opposite side of the cabinet if required.
- With all plumbing connections completed, turn on the Universal taps and check that all connections are watertight.
- Refit drawers using the reverse of the removal procedure.

BACK VIEW OF CABINET

This shows the open area at the rear of the tub to allow for positioning of the water inlets and waste water outlet.

Suggested height for water outlets ~600mm up from the floor (centered around the tap).


Suitable for P and S traps.

Trap attachment height ~ 460mm up from the floor.

Floor area required to fit laundry tub:

Width: 360mm

Depth: 570mm

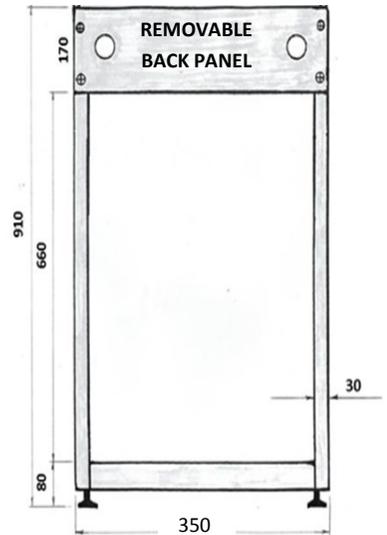

Notes:

1. Not recommended to have waste pipe within 50mm of plug centre line as this will make waste connections more difficult. **350**
2. Bracing on base of the cabinet extends in 40mm from each side and 70mm in from front and rear.
3. Height dimensions will vary a bit depending on the adjustment of the leveling feet.
4. On drawer models, drawer to floor and drawer to rear wall gap is at least 120mm to allow for plumbing connections.

If you require any additional assistance, please contact :
Aquatica NZ Ltd, P O Box 19146, Avondale, Auckland.

Phone: (09) 828 2068 Fax: (09) 828 2069

Email: info@aquatica.co.nz