

# Rinnai Energysaver 559FT

[Features](#) [Suitable for](#) [Compare](#) [Technical](#)

## Colour

## Input

9-23 MJ/h

## Output NG

1.9-5.1 kW (short flue)

1.9-5.3 kW (long flue)

## Output LPG

1.9-4.6 kW (short flue)

1.9-4.9 kW (long flue)


## Efficiency

83%

## Energy Star Rating



|                                 |  |
|---------------------------------|--|
| <b>Burner</b>                   | Stainless steel bunsen burner  |
| <b>Description</b>              | High efficiency forced flue convection heater supported by electronic timers                             |
| <b>Data plate</b>               | Lower bottom panel, left hand side   |
| <b>Electrical supply</b>        | 230 V 50 Hz with supply cord and 3-pin plug  |
| <b>Fan</b>                      | Cross flow fan   |
| <b>Gas connection</b>           | 15 mm BSP male thread  |
| <b>Gas control</b>              | Rinnai electronic modulating gas control valve   |
| <b>Humidifier tray capacity</b> | 1.0 L  |
| <b>Ignition</b>                 | Direct continuous spark electronic ignition—no pilot   |
| <b>Noise level</b>              | 33-42 dB(A)  |
| <b>Power consumption</b>        | Approx. 50 W (on high), < 1 W on standby   |
| <b>Safety devices</b>           | Overheat switch, fusible link, flame failure device, electrical fuse, and power failure                  |
| <b>Temperature range</b>        | 16-26 °C by 1 °C increments  |
| <b>Weight</b>                   | 26 kg  |
| <b>Compliance</b>               | ES: Supplier Declaration of Compliance<br>• Declaration Number: 1408020132<br>• Certificate Number: 5209 |
| <b>Market release</b>           | 2010   |

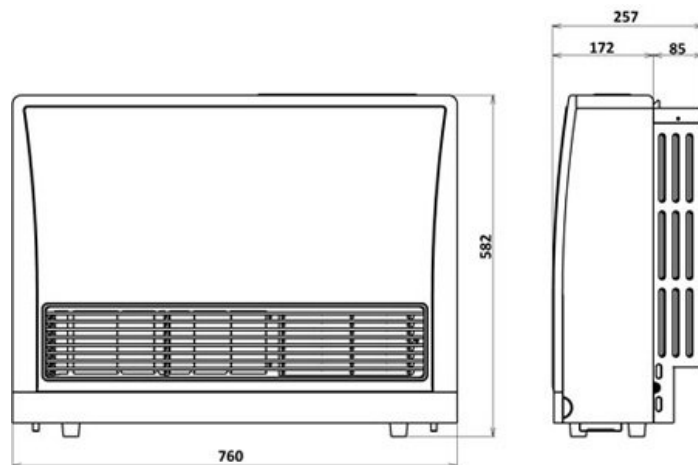

Product technical statement



Operation and installation guide



Flue installation guide



Mushroom flue installation



ESBEND Installation



Spares