

Rinnai Energysaver 561FT

[Features](#) | [Suitable for](#) | [Compare](#) | [Technical](#)

Colour

Input

9-21 MJ/h

Output

1.9-4.9 kW


Efficiency

82%

Energy Star Rating



Burner	Stainless steel bunsen burner
Description	High efficiency forced flue convection heater supported by electronic timers
Data plate	Lower bottom panel, left hand side
Electrical supply	230 V 50 Hz with supply cord and 3-pin plug
Fan	Centrifugal drum type fan
Gas connection	15 mm BSP male thread
Gas control	Rinnai electronic modulating gas control valve
Humidifier tray capacity	1.0 L
Ignition	Direct continuous spark electronic ignition—no pilot
Noise level	34-42 dB(A)
Power consumption	Approx. 50 W on high, < 1 W on standby
Safety devices	Overheat switch, fusible link, flame failure device, electrical fuse, and power failure
Temperature range	16-26 °C by 1 °C increments
Weight	25 kg
Compliance	ES: Supplier Declaration of Compliance • Declaration Number: 1408020132 • Certificate Number: 5209
Market release	March 2013

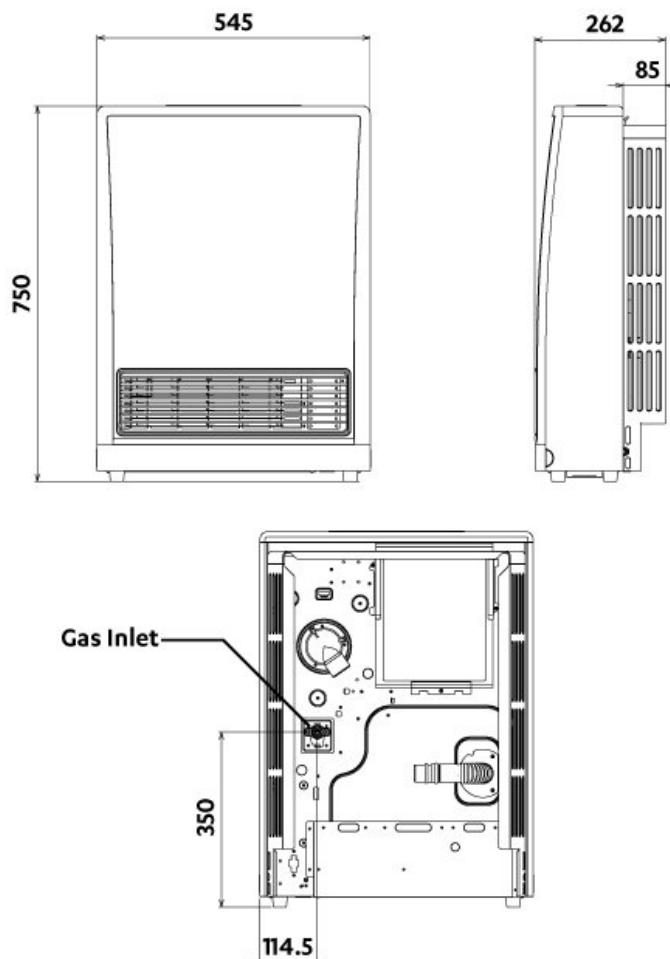



Product technical statement



Operation and installation guide



Mushroom flue installation



Back spacer kit installation



Spares



Flue installation guide